

# **ATTACHMENTS FOR EVERY MACHINE AND EVERY JOB**



# IGNITE ATTACHMENTS

## ARE AMERICAN MADE, FOR ALL BRANDS OF COMPACT EQUIPMENT.

With a variety of attachments and implements for farming, gardening, construction and landscaping, Ignite has the perfect match for your equipment—in your price range and delivered right to your door.


### WHY IGNITE ATTACHMENTS?

Quality manufacturing in America at a great price. Designed to fit the machines you already own and shipped directly to your door. Need more? How about head-to-head comparisons with our competition?

Take grapples for example.

This chart shows how Ignite Attachment grapples edge out the competition in terms of:

- Strength, workmanship and optimal weight
- Quality couplers and hose protection
- Cylinder performance and protection
- Greasable pins

		OUR COMPETITORS						
		BLUE DIAMOND	VIRNIG	JENKINS	QUICK ATTACH	SPARTAN	SKID PRO	TITAN
WORKMANSHIP/ OPTIMAL WEIGHT	✓	✗	✗	✗	✗	✓	✗	✗
QUALITY COUPLERS & HOSE ROUTING	✓	✗	✓	✗	✗	✗	✗	✗
CYLINDER PERFORMANCE AND PROTECTION	✓	✗	✗	✓	✓	✗	✗	✓
GREASABLE PINS	✓	✗	✓	✗	✓	✓	✓	✓

For more detailed information, visit [IgniteAttachments.com](http://IgniteAttachments.com).



# GRAPPLES



## ROCK GRAPPLE

The Ignite rock grapple attachment grips rock, boulders, large debris, tree limbs and other brush while leaving soil behind. This well-built attachment provides optimal weight, reserving more of your loader's rated operating capacity for lifting and transporting heavy materials. Available in 62-, 68-, 74- and 82-inch models.

ROCK GRAPPLES	62 INCH	68 INCH	74 INCH	82 INCH
WIDTH	61.9 in.	68.7 in.	75.4 in.	82.1 in.
WEIGHT	833 lbs.	873 lbs.	913 lbs.	953 lbs.
HEIGHT GRAPPLE OPEN	40.5 in.	40.5 in.	40.5 in.	40.5 in.
GRAPPLE OPENING	28.9 in.	28.9 in.	28.9 in.	28.9 in.
CYLINDERS	2 (2.5 in. Bore x 1.25 in. Rod)	2 (2.5 in. Bore x 1.25 in. Rod)	2 (2.5 in. Bore x 1.25 in. Rod)	2 (2.5 in. Bore x 1.25 in. Rod)
QUICK COUPLERS	Faster Flat Face (CUP)	Faster Flat Face (CUP)	Faster Flat Face (CUP)	Faster Flat Face (CUP)
TINE SPACING	3.1 in.	3.1 in.	3.1 in.	3.1 in.
TINE THICKNESS	.25 in.	.25 in.	.25 in.	.25 in.
MATERIAL	Grade 50	Grade 50	Grade 50	Grade 50
TOP GRAPPLE STYLE	Dual Independent	Dual Independent	Dual Independent	Dual Independent



## ROOT GRAPPLE

The Ignite root grapple is made for heavy-duty work, whether it's lifting and moving roots, rock, brush, logs or other debris. Designed and manufactured in the USA, the root grapple is a must-have attachment for equipment owners in construction, demolition, land clearing or brush removal applications—or anyone who wants to move heavy materials and hard-to-handle objects. Available in 62-, 68-, 74- and 82-inch models.

ROOT GRAPPLES	62 INCH	68 INCH	74 INCH	82 INCH
WIDTH (OVERALL OUTSIDE)	61.1 in.	67.9 in.	74.6 in.	81.4 in.
WEIGHT	800 lbs.	840 lbs.	875 lbs.	920 lbs.
HEIGHT GRAPPLE CLOSED	31.1 in.	31.1 in.	31.1 in.	31.1 in.
LENGTH GRAPPLE CLOSED	35.4 in.	35.4 in.	35.4 in.	35.4 in.
QUICK COUPLERS	Faster Flat Face (CUP)	Faster Flat Face (CUP)	Faster Flat Face (CUP)	Faster Flat Face (CUP)
CYLINDERS	2 (2.5 in. Bore x 1.25 in. Rod)	2 (2.5 in. Bore x 1.25 in. Rod)	2 (2.5 in. Bore x 1.25 in. Rod)	2 (2.5 in. Bore x 1.25 in. Rod)
GRAPPLE OPENING	31.5 in.	31.5 in.	31.5 in.	31.5 in.
QUICK COUPLERS	Faster Flat Face (CUP)	Faster Flat Face (CUP)	Faster Flat Face (CUP)	Faster Flat Face (CUP)
TINE SPACING	6.4 in.	6.4 in.	6.4 in.	6.4 in.
TINE THICKNESS	.4 in.	.4 in.	.4 in.	.4 in.
MATERIAL	Grade 50	Grade 50	Grade 50	Grade 50
TOP GRAPPLE STYLE	Dual Independent	Dual Independent	Dual Independent	Dual Independent

For more detailed information, visit [IgniteAttachments.com](http://IgniteAttachments.com).



### BUCKET GRAPPLE

Whether it's brush, rock or construction debris, the bucket grapple is an all-purpose material handler that takes it all, clamping down on large objects and irregular chunks of material that are hard to handle with a bucket alone. Use anywhere you deal with both hard-to-hold material in addition to dirt and fine debris that you can't leave behind. Available in 62-, 68-, 74- and 82-inch models.


BUCKET GRAPPLES	62 INCH	68 INCH	74 INCH	82 INCH
OVERALL WIDTH (CUTTING EDGE)	62 in.	69 in.	75.5 in.	82 in.
WEIGHT	758 lbs.	791 lbs.	821 lbs.	852 lbs.
HEIGHT GRAPPLE CLOSED	29.6 in.	29.6 in.	29.6 in.	29.6 in.
LENGTH GRAPPLE CLOSED	40.3 in.	40.3 in.	40.3 in.	40.3 in.
CYLINDERS	2 (2.5 in. Bore x 1.25 in. Rod)	2 (2.5 in. Bore x 1.25 in. Rod)	2 (2.5 in. Bore x 1.25 in. Rod)	2 (2.5 in. Bore x 1.25 in. Rod)
GRAPPLE OPENING	34.5 in.	34.5 in.	34.5 in.	34.5 in.
CUTTING EDGE	.75 x 6 in.	.75 x 6 in.	.75 x 6 in.	.75 x 6 in.
QUICK COUPLERS	Faster Flat Face (CUP)	Faster Flat Face (CUP)	Faster Flat Face (CUP)	Faster Flat Face (CUP)
MATERIAL	Grade 50	Grade 50	Grade 50	Grade 50
TOP GRAPPLE STYLE	Dual Independent	Dual Independent	Dual Independent	Dual Independent



# GRAPPLES

## RAKE GRAPPLE

Available in 66-, 78- and 84-inch widths, the rake grapple is designed to provide full coverage for the width of your loader. The Ignite rake grapple attachment opens wide and sinks its teeth into tough land clearing, debris removal and site preparation tasks. It can open up to 50 inches to handle large and varied loads of material.

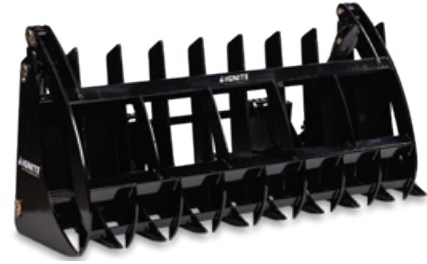

RAKE GRAPPLES	66 INCH	78 INCH	84 INCH
OVERALL WIDTH	66 in.	78 in.	84 in.
WEIGHT	661 lbs.	736 lbs.	780 lbs.
OVERALL HEIGHT (CLOSED)	37.2 in.	37.2 in.	37.2 in.
GRAPPLE OPENING	47.9 in.	47.9 in.	47.9 in.
CYLINDERS	2 (2 in. Bore x 1.375 in. Rod)	2 (2 in. Bore x 1.375 in. Rod)	2 (2 in. Bore x 1.375 in. Rod)
QUICK COUPLERS	Faster Flat Face (CUP)	Faster Flat Face (CUP)	Faster Flat Face (CUP)
TINE THICKNESS	.5 in.	.5 in.	.5 in.
TOP GRAPPLE STYLE	Single	Single	Single



## STUMP BUCKET GRAPPLE

A 41.7-inch jaw opening paired with compact depth maximizes loader breakout force for removing and transporting stumps, roots and rocks. The bucket is reinforced with large gusset plates for added strength.

STUMP BUCKET & GRAPPLE	BUCKET GRAPPLE	BUCKET
WIDTH	46.6 in.	46.6 in.
WEIGHT	165 lbs.	348 lbs.
OVERALL HEIGHT (GRAPPLE CLOSED)	27.1 in.	21.5 in.
OVERALL LENGTH (GRAPPLE CLOSED)	63.5 in.	63.5 in.
CUTTING EDGE	N/A	12 in. x 8 in. x 1 in.
CUTTING EDGE MATERIAL	N/A	Borax 500
QUICK COUPLERS	Faster Flat Faced	N/A
CYLINDERS BORE DIAMETER	2.5 in.	N/A
GRAPPLE OPENING	41.7 in.	N/A
MATERIAL	Grade 50	Grade 50
HP RANGE	Up to 100	Up to 100



For more detailed information, visit [IgniteAttachments.com](http://IgniteAttachments.com).

## BREAKERS

With a powerful strike force, Ignite breakers are designed for long life and minimal maintenance for all types of demolition jobs. Few service parts reduce operation costs, reduce potential for downtime and improve overall life of the attachment.



BREAKERS	LIGHT DUTY	STANDARD DUTY	HEAVY DUTY
WEIGHT	503 lbs.	840 lbs.	1005 lbs.
FLOW RANGE	7-13 gpm	11-18 gpm	13-24 gpm
OPERATING PRESSURE	1,276-1,697 psi	1,566-1,987 psi	1,711-2,132 psi
TOOL DIAMETER	2.1 in.	2.7 in.	2.9 in.
IMPACT ENERGY	214-236 ft./lbs.	435-465 ft./lbs.	778-819 ft./lbs.
N2 CHARGE PRESSURE	239 psi	239 psi	239 psi



# BUCKETS



LOADER BUCKETS	36 INCH	44 INCH	50 INCH	56 INCH HEAVY DUTY	62 INCH HEAVY DUTY	68 INCH HEAVY DUTY	68 INCH SEVERE DUTY	74 INCH HEAVY DUTY	74 INCH SEVERE DUTY
WEIGHT	185 lbs.	207 lbs.	223 lbs.	318 lbs.	336 lbs.	354 lbs.	470 lbs.	373 lbs.	533 lbs.
LENGTH	30 in.	30 in.	30 in.	31.3 in.	31.3 in.	31.3 in.	32 in.	31.3 in.	32 in.
HEIGHT	19.9 in.	19.9 in.	19.9 in.	19.8 in.	19.8 in.	19.8 in.	21.5 in.	19.8 in.	21.5 in.
ISO HEAPED CAPACITY	6 cu. ft	7.4 cu. ft	8.5 cu. ft	10.7 cu. ft	12 cu. ft	13.3 cu. ft	14 cu. ft	14.5 cu. ft	15.4 cu. ft

ROCK BUCKETS	62 INCH	68 INCH	74 INCH	82 INCH
WIDTH	61.9 in.	68.6 in.	75.4 in.	82.1 in.
WEIGHT	503 lbs.	543 lbs.	584 lbs.	624 lbs.
HEIGHT	21.8 in.	21.8 in.	21.8 in.	21.8 in.
LENGTH	38.6 in.	38.6 in.	38.6 in.	38.6 in.
TINE SPACING	3.1 in.	3.1 in.	3.1 in.	3.1 in.
TINE THICKNESS	.25 in.	.25 in.	.25 in.	.25 in.
MATERIAL	Grade 50	Grade 50	Grade 50	Grade 50



COMPACT TRACTOR	48 INCH	60 INCH	66 INCH	72 INCH
DEPTH	17 in.	19 in.	23 in.	22 in.
HEIGHT	22 in.	22 in.	23 in.	22 in.
WEIGHT	170 lb.	180 lbs.	192 lbs.	202 lbs.
CAPACITY	6.75 cu. ft	8.37 cu. ft	12.69 cu. ft	15.12 cu. ft



## SKID STEER AND COMPACT LOADER BUCKETS

### General Purpose Bucket for Mini Loaders

Ideal for light-duty grading and leveling applications as well as material handling, this attachment combines good bucket breakout force and a longer bottom for increased capacity and visibility to the cutting edge. Available in 36-, 44- and 50-inch sizes.

### 44-inch Dirt Bucket for Mini Loaders

Get excellent breakout force for better digging and easier bucket filling so you can get more done faster.

### Heavy Duty Bucket

Ideal for heavy-duty grading, leveling and material handling, this highly versatile and economical option meets the demands of tough jobs with excellent visibility to the cutting edge. Available in 56-, 62-, 68- and 74-inch models.

### Severe Duty Bucket

Take on your toughest jobs with our strongest bucket yet. The severe-duty bucket is built with excellent bucket

breakout force for better digging and easier bucket filling, helping you work smarter, not harder. Ideal for tackling severe-duty grading, leveling and material handling in aggressive conditions. Available in 68- and 74-inch models.

## ROCK BUCKET

The Ignite rock bucket collects rocks, debris and large clumps of material, allowing the fine material to slip through its tough tines. The tough, piercing teeth penetrate packed-in dirt, mulch and other materials. The rock bucket can also be used to tear out vegetation and tangled brush from the surface. Available in 62-, 68-, 74- and 82-inch sizes.


## COMPACT TRACTOR BUCKET

Ignite's standard compact tractor bucket is available in 48-, 60-, 66- and 72-inch sizes, each featuring a standard universal attachment plate for compatibility with tractors equipped with the universal quick attach interface. The wear bar design provides wear protection, backs up the cutting edge and adds strength to the bottom of the bucket.

For more detailed information, visit [IgniteAttachments.com](http://IgniteAttachments.com).




EXCAVATOR BUCKETS	18 INCH CLASS 2	24 INCH CLASS 3	24 INCH CLASS 4
WEIGHT	142 lbs.	206 lbs.	258 lbs.
LENGTH	26.05 in.	28.82 in.	31.57 in.
WIDTH	18 in.	24 in.	24 in.
HEIGHT	17.17 in.	20.32 in.	22.05 in.
ISO HEAPED CAPACITY	1.8 cu. ft	3.6 cu. ft	4.4 cu. ft
TEETH	4 Welded-On Teeth	4 Welded-On Teeth	4 Welded-On Teeth

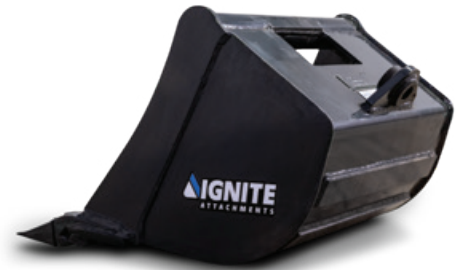

SWEeper	72 INCH
WEIGHT	1030 lbs.
WIDTH (OVERALL)	76 in.
LENGTH	58.7 in.
HEIGHT	24.8 in.
BUCKET CAPACITY	8.8 cu. ft
BRISTLE MATERIAL	Polypropylene
FLOW RANGE	15.9-30.4 gal/min.
PRESSURE RANGE/MAX.	2466-3481 psi
BROOM SPEED @ FLOW (RPM)	247 rpm @ 16.9 gpm



CONCRETE CHUTE BUCKET	
WEIGHT	393 lbs.
OVERALL HEIGHT	24.5 in.
OVERALL WIDTH (WITH STEPS)	56 in.
BUCKET WIDTH	50 in.
BUCKET LENGTH	36.8 in.
OVERALL LENGTH (WITH CHUTE)	71.6
CAPACITY	1/4-3/4 yard
CHUTE LENGTH	40.1 in.
WRAP THICKNESS	7 gauge

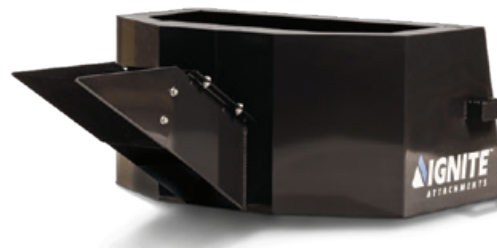

### EXCAVATOR BUCKET

Dig narrow, deep trenches while maintaining excellent breakout force and fast cycle times. Excavator buckets come in three sizes: 18-inch, Class 2; 24-inch, Class 3 and 24-inch, Class 4.

### EXCAVATOR COUPLERS

Two sizes of Ignite Couplers are specifically designed to fit Bobcat E42-E55 mini excavators (for class 3 and 4 excavator buckets) and Bobcat E26-E35 mini excavators (for class 2 and 3 excavator buckets)—enabling you to switch out and secure bucket attachments quickly and easily.

### SWEeper BUCKET

For quick cleanup, the sweeper bucket is outfitted with rubber skirting and standard cutting edges for easy sweeping, cleaning and dumping. A height adjustment system and reversible cutting edges keep your attachment and its bristles lasting longer—so you can clear the path for your next job. Plus, add the gutter brush accessory to really scrub dirt and debris from gutters, curbs and hard-to-reach areas.

### CONCRETE CHUTE BUCKET

Ensure your pours are right on the money with the Ignite Concrete Chute Bucket. It has a removeable spout to use in small areas and is made of laser cut, robot welded steel for a precise, tight fit and added strength and consistency. Up to 3/4-yard capacity to get the most from your pours.

# SNOW REMOVAL

## 3-POINT SNOWBLOWER

Manage snowy areas and blow snow off concrete, gravel driveways and parking lots, or clear paths around acreages or barns. Adjustable skid shoes can scrape pavement clean or be set higher to accommodate gravel areas. Available in 50-, 60-, 66- and 74-inch models. An optional hydraulic rotation chute fits all snowblower sizes, hooks up to your tractor's rear auxiliary hydraulics and allows you to change the direction of snow placement on the fly from your existing controls.

## SNOW BLADES


Even the deepest snowfalls are no match for the Ignite snow blade. Available in four heavy-duty sizes, 72, 84, 94 and 108 inches, plow efficiently with durability and high-grade steel construction.

## SNOW PUSHER

The Ignite snow pusher turns heavy snow into a lighter lift for your machines with faster and more efficient snow pushing capabilities. Available in four snow-pushing sizes, 6, 7, 8 and 10-foot coverage, these snow pusher attachments are compatible with skid steer loaders, compact track loaders and compact tractors equipped with a universal quick attach interface. Add more versatility with an optional back drag kit, enabling you to pull snow away from buildings and other places that are harder to reach. Look forward to 10-foot coverage coming soon!



SNOWBLOWERS	50 INCH	60 INCH	66 INCH	74 INCH
TRACTOR HP (PTO)	15-35 hp	15-35 hp	25-50 hp	40-65 hp
WEIGHT	493 lbs.	529 lbs.	593 lbs.	629 lbs.
WIDTH	54 in.	64 in.	70 in.	78 in.
HEIGHT	22 in.	22 in.	22 in.	22 in.
INTAKE HEIGHT	22 in.	22 in.	22 in.	22 in.
FAN DIAMETER	19 in.	19 in.	19 in.	19 in.
AUGER DIAMETER	14 in.	14 in.	14 in.	14 in.
SKID SHOES	Adjustable	Adjustable	Adjustable	Adjustable

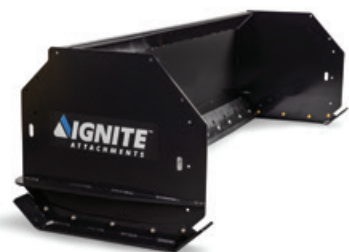

SNOW PUSHERS	6 FOOT	7 FOOT	8 FOOT	10 FOOT
WEIGHT	448 lbs.	568 lbs.	605 lbs.	881 lbs.
WORKING WIDTH	69 in.	85 in.	91 in.	117 in.
MOLDBOARD HEIGHT	30 in.	37 in.	37 in.	34 in.
MOLDBOARD THICKNESS	10 gauge rolled steel	10 gauge rolled steel	10 gauge rolled steel	10 gauge rolled steel
SIDE PANELS	1/4 x 31 x 33 in. reinforced steel	1/4 x 38 x 39 in. reinforced steel	1/4 x 38 x 39 in. reinforced steel	1/4 x 38 x 39 in. reinforced steel
WEAR EDGE	1.5 x 8 in. rubber (replaceable)	1.5 x 8 in. rubber (replaceable)	1.5 x 8 in. rubber (replaceable)	1.5 x 8 in. rubber (replaceable)
SKID SHOES	1/4 in. formed steel (replaceable)	3/8 in. grade 50 formed steel (replaceable)	3/8 in. grade 50 formed steel (replaceable)	3/8 in. grade 50 formed steel (replaceable)
REQUIRED LOADER HORSEPOWER	30-60 hp	35-80 hp	40-80 hp	50-59 hp
REQUIRED TRACTOR HORSEPOWER	30-75 hp	45-90 hp	55-100 hp	60-100 hp



SNOW BLADES	72 INCH	84 INCH	94 INCH	108 INCH
WIDTH (OVERALL)	72.5 in.	84.5 in.	94.5 in.	108.5 in.
WEIGHT	470 lbs.	497 lbs.	537 lbs.	552 lbs.
LENGTH	29 in.	29 in.	29 in.	29 in.
MOLDBOARD HEIGHT	24.5 in.	24.5 in.	24.5 in.	24.5 in.
MOLDBOARD THICKNESS	.125 in.	.125 in.	.125 in.	.125 in.
BLADE ANGLE ADJUSTMENT	28 Degrees	28 Degrees	28 Degrees	28 Degrees
CUTTING EDGE	.625 in. Reversible Bolt-On Steel	.625 in. Reversible Bolt-On Steel	.625 in. Reversible Bolt-On Steel	.625 in. Reversible Bolt-On Steel

For more detailed information, visit [IgniteAttachments.com](http://IgniteAttachments.com).

## PALLET FORKS & FRAMES

Move bulky, bagged or palletized material quickly and easily with pallet frames and fork attachments. The perfect fit for industrial plant and landscaping work, construction sites, farm chores, fertilizer handling and municipal projects.

PALLET FORKS	LIGHT DUTY*	STANDARD	HEAVY DUTY	SEVERE DUTY
WEIGHT	238 lbs.	122 lbs.	153 lbs.	229 lbs.
HEIGHT	34 in.	34.3 in.	34.3 in.	34.3 in.
WIDTH	46 in.	45.1 in.	45.1 in.	51.5 in.
LOAD CAPACITY	1200 lbs.**	2500 lbs.**	4000 lbs.**	5500 lbs.**
FORKS				
WEIGHT OF TWO TEETH	-	150 lbs.	164 lbs. (42 in.) 184 lbs. (48 in.)	238 lbs.
FORK WIDTH	-	4 in.	4 in.	4 in.
FORK LENGTH	42 in.	42 in.	42 in. or 48 in. available	48 in.
MATERIAL	-	Grade 50	Grade 50	Grade 50

\* Pallet fork and frame for compact tractors.

\*\*Do not exceed the recommended lift capacity of machine.



# LANDSCAPING

## LAND GRADER

For those looking to move and level out the roughest gravel and dirt surfaces, the Ignite land grader is one smooth operator. Available in 5- and 6-foot widths, its two cutting edges deliver maximum grading capabilities. Made from high-quality steel, this essential attachment is corrosion resistant and built to last.

LAND GRADER	60 INCH	72 INCH
WIDTH (OVERALL)	65 in.	76 in.
HEIGHT	35 in.	35 in.
LENGTH	48 in.	48 in.
WEIGHT	430 lbs.	465 lbs.
SKID SHOE THICKNESS	.375 in. Adjustable	.375 in. Adjustable
CUTTING EDGES	.375 x 6 in.	.375 x 6 in.
CUTTING EDGE ANGLE	10 degrees	10 degrees
HITCH CATEGORY	Category 1	Category 1
QUICK HITCH COMPATIBLE	Yes	Yes
TRACTOR HORSEPOWER	23-50 hp	35-50 hp



For more detailed information, visit [IgniteAttachments.com](https://www.igniteattachments.com).

## AUGER

The Ignite auger attachment drills holes in daunting jobs with straight-up precision and performance. Productive torque ratio at any rpm effectively bites through tough materials. And with self-balancing alignment, this auger easily positions itself for a straight, vertically accurate hole, even when working on slopes and uneven surfaces.



AUGERS	75DDH	165DDH	150PH	210PH
OVERALL WIDTH	45 in.	45 in.	45 in.	45 in.
DRIVE UNIT WIDTH	9.38 in.	9.38 in.	11.25 in.	11.25 in.
WEIGHT WITH MOUNT	315 lbs.	343 lbs.	309 lbs.	310 lbs.
DRIVE UNIT HEIGHT	33.5 in.	33.5 in.	33.5 in.	33.5 in.
MAX BIT SIZE	24 in.	36 in.	30 in.	36 in.
DRIVE SHAFT	2 in. Hex	2 in. Hex	2 in. Hex	2 in. Hex
PRESSURE RANGE	2000-3500 psi	2000-3500 psi	2000-3500 psi	2000-3500 psi
TORQUE @ 3,000 PSI	1118 lbs./ft per psi	2478 lbs./ft per psi	1783 lbs./ft per psi	2562 lbs./ft per psi
MAX FLOW	20 gpm	24 gpm	20 gpm	30 gpm
SPEED AT MAX FLOW	161 rpm	88 rpm	103 rpm	104 rpm
QUICK COUPLERS	Faster Flat Face (CUP)	Faster Flat Face (CUP)	Faster Flat Face (CUP)	Faster Flat Face (CUP)
ATTACHMENT INTERFACE	Universal Quick-Attach	Universal Quick-Attach	Universal Quick-Attach	Universal Quick-Attach

Visit [igniteattachments.com](http://igniteattachments.com) for a full list of auger bits and extensions.



# LANDSCAPING & AGRICULTURE



## TILLER

With 48-, 60- and 72-inch sizes of 3-point hitch Ignite tiller attachments, you can choose what best fits your tractor's width and PTO horsepower. All three sizes are designed to work close to buildings, fences and trees, which makes them perfect for cultivating, aerating and stirring up soil for gardens, food plots and other tillage needs.

## ANGLE BLADE

The perfect fit for your compact tractor, this angle blade is an economical choice for leveling, backfilling, grading and removing snow on farms or acreages. Ignite angle blades are also available in 60-, 72- and 84-inch blade widths.

ANGLE BLADE	60 INCH	72 INCH	84 INCH
WEIGHT	308 lbs.	332 lbs.	348 lbs.
LENGTH	40 in.	40 in.	40 in.
WIDTH	60 in.	72 in.	84 in.
MOLDBOARD HEIGHT	15 in.	15 in.	15 in.
CUTTING EDGE	6 in.	6 in.	6 in.
HITCH CATEGORY	Category 1	Category 1	Category 1
OFFSET (MAX)	12 in. Left or Right	12 in. Left or Right	12 in. Left or Right
ADJUSTMENTS	Manual (360 Degree Rotation)	Manual (360 Degree Rotation)	Manual (360 Degree Rotation)
FORWARD & REVERSE PIVOTS	5 Positions	5 Positions	5 Positions

TILLERS	48 INCH	60 INCH	72 INCH
OPERATING WEIGHT	465 lbs.	638 lbs.	718 lbs.
WORKING WIDTH	46.5 in.	59 in.	70.5 in.
OVERALL WIDTH	51.5 in.	64 in.	76 in.
MAX WORKING DEPTH	7 in.	7 in.	7 in.
NUMBER OF FLANGES ON ROTOR	6	7	9
NUMBER OF TINES PER FLANGE	4	6	6
ROTOR ROTATION	Reversible (FWD/REV)	Reversible (FWD/REV)	Reversible (FWD/REV)
SKID SHOES (ADJUSTABLE)	.4, 1.4, 2.4 in.	.4, 1.4, 2.4 in.	.4, 1.4, 2.4 in.
DRIVELINE PROTECTION	Slip Clutch	Slip Clutch	Slip Clutch
HITCH	Category 1 Limited	Category 1	Category 1
PTO (RPM)	540	540	540
TRACTOR HP (PTO)	15-35	25-50	30-55



For more detailed information, visit [IgniteAttachments.com](http://IgniteAttachments.com).

## ROTARY CUTTER

The tractor rotary cutter attachment effortlessly cuts overgrown grass, stalks and light brush to help you keep pastures and other areas of your acreage looking great. Ignite rotary cutters are available in 48-, 60- and 72-inch models.

ROTARY CUTTERS	48 INCH	60 INCH	72 INCH
OPERATING WEIGHT	463 lbs.	530 lbs.	623 lbs.
CUTTING WIDTH	48 in.	60 in.	72 in.
OVERALL WIDTH	51 in.	64 in.	75 in.
LENGTH (INC. WHEEL)	77 in.	86 in.	93 in.
DECK HEIGHT	7.5 in.	7.5 in.	7.5 in.
CUTTING CAPACITY (STEM SIZE)	1 in.	1 in.	1 in.
CUTTING HEIGHT	1.5-9 in.	1.5-9 in.	1.5-9 in.
BLADE TIP SPEED	9,990 ft/min	12,480 ft/min	14,980 ft/min
BLADE SIZE	.5 in. x 3 in.	.5 in. x 3 in.	.5 in. x 3 in.
DRIVELINE PROTECTION	Shear Bolt	Shear Bolt	Shear Bolt
HITCH	Category 1	Category 1	Category 1
PTO (RPM)	540 rpm	540 rpm	540 rpm
TRACTOR HP	18-45 hp	20-50 hp	25-60 hp
DECK MATERIAL THICKNESS	11 ga.	11 ga.	11 ga.



## FINISH MOWER

You can cover more ground with a 60- or 72-inch finish mower attachment from Ignite. Its wide triple-blade design can give large properties a professional-quality cut quickly while also providing excellent maneuverability. The simple design and easy-to-access service points make maintenance a snap, ensuring years of high-quality performance.

FINISH MOWERS	60 INCH	72 INCH
HP RANGE	23-40 hp	32-40 hp
WHEEL TYPE	Solid Rubber Wheels	Solid Rubber Wheels
NUMBER OF BLADES	3	3
WEIGHT	418 lbs.	495 lbs.
WORKING WIDTH	60 in.	72 in.
OVERALL WIDTH	62 in.	73 in.
HITCH TYPE	Fully Floating 3-Point Hitch, Category 1	Fully Floating 3-Point Hitch, Category 1
PTO INPUT SPEED	540 rpm	540 rpm



# LANDSCAPING & AGRICULTURE

## TINE RAKE

This highly versatile tine rake collects debris and smooths lawns in preparation for reseeding and fertilizing, as well as quickly getting rid of surface debris for maintaining gravel parking lots, driveways or walking trails. Available in 60-, 72- and 84-inch widths.

TINE RAKES	60 INCH	72 INCH	84 INCH
OPERATING WEIGHT	248 lbs.	272 lbs.	287 lbs.
LENGTH	40 in.	40 in.	40 in.
WIDTH	60 in.	72 in.	84 in.
TINES (QTY)	30	36	42
HITCH	Category 1	Category 1	Category 1
ADJUSTMENT TYPES	Manual (360 Degree Rotation)	Manual (360 Degree Rotation)	Manual (360 Degree Rotation)
TRACTOR HP	60 max	60 max	60 max
FORWARD PIVOT	5 Positions	5 Positions	5 Positions
REVERSE PIVOT	5 Positions	5 Positions	5 Positions

## MIDDLE BUSTER

Break up topsoil, create planting rows for gardens and food plots, aerate roots, improve water drainage, accelerate plant growth, and harvest crops faster with the Ignite middle buster for compact tractors.

MIDDLE BUSTER	3-POINT MIDDLE BUSTER
HITCH	Category 1
TRACTOR HP RANGE/EQUIPMENT	25-45 lbs.
WEIGHT	70 lbs.
OVERALL WIDTH	32 in.
OVERALL LENGTH	15 in.
HEIGHT	33 in.
MOLDBOARD/TINE DIMENSIONS	15 x 11 in. Double-Wing Cutting Blade
DIGGING DEPTH	0-12 in.
QUICK HITCH COMPATIBLE	Yes



For more detailed information, visit [IgniteAttachments.com](https://www.igniteattachments.com).



## DISC HARROW

Use the Ignite disc harrow to prepare ground for spring planting or condition soil in the fall. Notched blades can cut plant residue, break up clumps and prepare an ideal surface for planting food plots, gardens or small-acreage crops. Easily connect to a 3-point hitch with a 60-, 72- or 84-inch Ignite disc harrow.



DISC HARROWS	60 INCH	72 INCH	84 INCH
TRACTOR HORSEPOWER REQUIRED	18-32 hp	22-40 hp	30-55 hp
OPERATING WEIGHT	407 lbs.	553 lbs.	846 lbs.
LENGTH	53 in.	50 in.	53.5 in.
CULTIVATION WIDTH	62.5 in.	75.0 in.	85 in.
HEIGHT	32 in.	41 in.	41 in.
NUMBER OF DISC BLADES	16	20	20
DISC BLADE SPACING	7.5 in.	7.5 in.	7.5 in.
DISC BLADE TYPES	14 in. dia. x .12 Notched	Front: 18 in. dia. x .12 Notched Back: 18 in. dia. x .12 Smooth	Front: 18 in. dia. x .12 Notched Back: 18 in. dia. x .12 Smooth
DISC BLADE TYPES CONT.			
BEARING TYPE	2 Replaceable Sealed per Gang	2 Replaceable Sealed per Gang	2 Replaceable Sealed per Gang
GANGE AXLE ADJUSTABILITY	2.5-15 Degrees	2.5-15 Degrees	2-22 Degrees Front Gang
GANGE AXLE ADJUSTABILITY CONT.			11-22 Degrees Rear Gang
HITCH	CAT 0 Spacing	CAT 1 Spacing	CAT 1
QUICK HITCH COMPATIBLE	No	Yes	Yes



# LANDSCAPING & AGRICULTURE

## 3-POINT HAY SPEAR

Penetrate and move up to 1,500 or 2,000 pounds of hay quickly and easily using the Ignite hay spear 1500 or 2000 Series. The heat-treated upper spear provides extra strength for sharper and more consistent penetration. Plus, welded stabilizer bars provide additional support to ensure your hay bale stays in one place so you can work more confidently.

HAY SPEARS	1500 SERIES	HEAVY DUTY 2000 SERIES
HITCH	Category 1	Category 1 and 2
TRACTOR HP RANGE/ EQUIPMENT	20 Minimum	20 Minimum
WEIGHT	65 lbs.	98 lbs.
SPEAR DIAMETER	1.8 in. Tapered	1.8 in. Tapered
SPEAR OVERALL LENGTH	48.75 in.	48.75 in.
IMPLEMENT CAPACITY	1500 lbs.*	2000 lbs.*
NUMBER OF SPIKES	1 Main/2 Stabilizer	1 Main/2 Stabilizer
STABILIZER SPIKE	2-1.25 in. dia. Welded	2-1.25 in. dia. Welded
QUICK HITCH COMPATIBLE	Yes	Yes

## BALE SPEARS **COMING SOON**

Indispensable on any farm, the Ignite quick-attaching, versatile bale spear easily moves and places bales of hay wherever you need them to go, boosting productivity and saving precious time, effort and hassle.

BALE SPEARS	ROUND BALE SPEAR	SQUARE BALE SPEAR	COMBINATION BALE SPEAR
UPPER SPEAR LENGTH	42.75 in. (1 Total)	N/A	42.75 in. (1 Total)
LOWER SPEAR LENGTH	12 in. (2 Total)	26.50 in. (3 Total)	26.50 in. (3 Total)
OVERALL WIDTH	45 in.	45 in.	45 in.
OVERALL HEIGHT	22 in.	36 in.	36 in.
OVERALL LENGTH	51.30 in.	35.20 in.	35.20 in.
FRAME LENGTH	8.75 in.	8.75 in.	8.75 in.
WEIGHT	195 in.	209 in.	230 in.
MAXIMUM LOAD	3,000 lbs.	4,500 lbs.	5,000 lbs.



For more detailed information, visit [IgniteAttachments.com](http://IgniteAttachments.com).

### BOX BLADE FOR TRACTORS

This heavy-duty rear-mount box blade offers you perfect compatibility for leveling, backfilling, grading and moving a variety of materials. Ignite box blades are available in 48-, 60- and 72-inch widths. Four hole ripper shanks adjust up or down to vary the cutting depth for mixing loose soil or tearing through compacted soil or rocks. Cutting edges on both the front and back blades allow you to work in forward or reverse so you can get more done in less time. Reversible steel cutting edges allow you to simply flip the blade over to get a fresh cut and double the life.

BOX BLADES	48 INCH	60 INCH	72 INCH
OPERATING WEIGHT	245 lbs.	395 lbs.	445 lbs.
LENGTH	28 in.	31 in.	31 in.
WIDTH	49.5 in.	61.5 in.	73.5 in.
HEIGHT	32 in.	33 in.	33 in.



### 3-POINT HITCH FOR COMPACT TRACTORS

Attach the Ignite quick hitch to your tractor's 3-point hitch to change rear tractor implements in seconds. Just back up to connect the implement, hook up and go. Compatible with most Category 1 implements.

QUICK HITCH	3-POINT QUICK HITCH
WIDTH	30.25 in.
HEIGHT	23 in.
DEPTH	8.25 in.
WEIGHT	76 lbs.




### REAR BALLAST FOR TRACTORS

A rear ballast box is essential when you need maximum lifting capacity, stability and traction, but it can be easily removed to use your other attachments.

BALLAST	REAR BALLAST FOR TRACTORS
HITCH TYPE	Category 1
WIDTH	35.6 in.
TOTAL HEIGHT	28.1 in.
LENGTH (BOX)	17.6 in.
LENGTH (TOTAL)	22.6 in.
WEIGHT (EMPTY)	182 lbs.
WEIGHT (FULL MAX)	760 lbs.

**RIGHT FIT  
RIGHT PRICE**

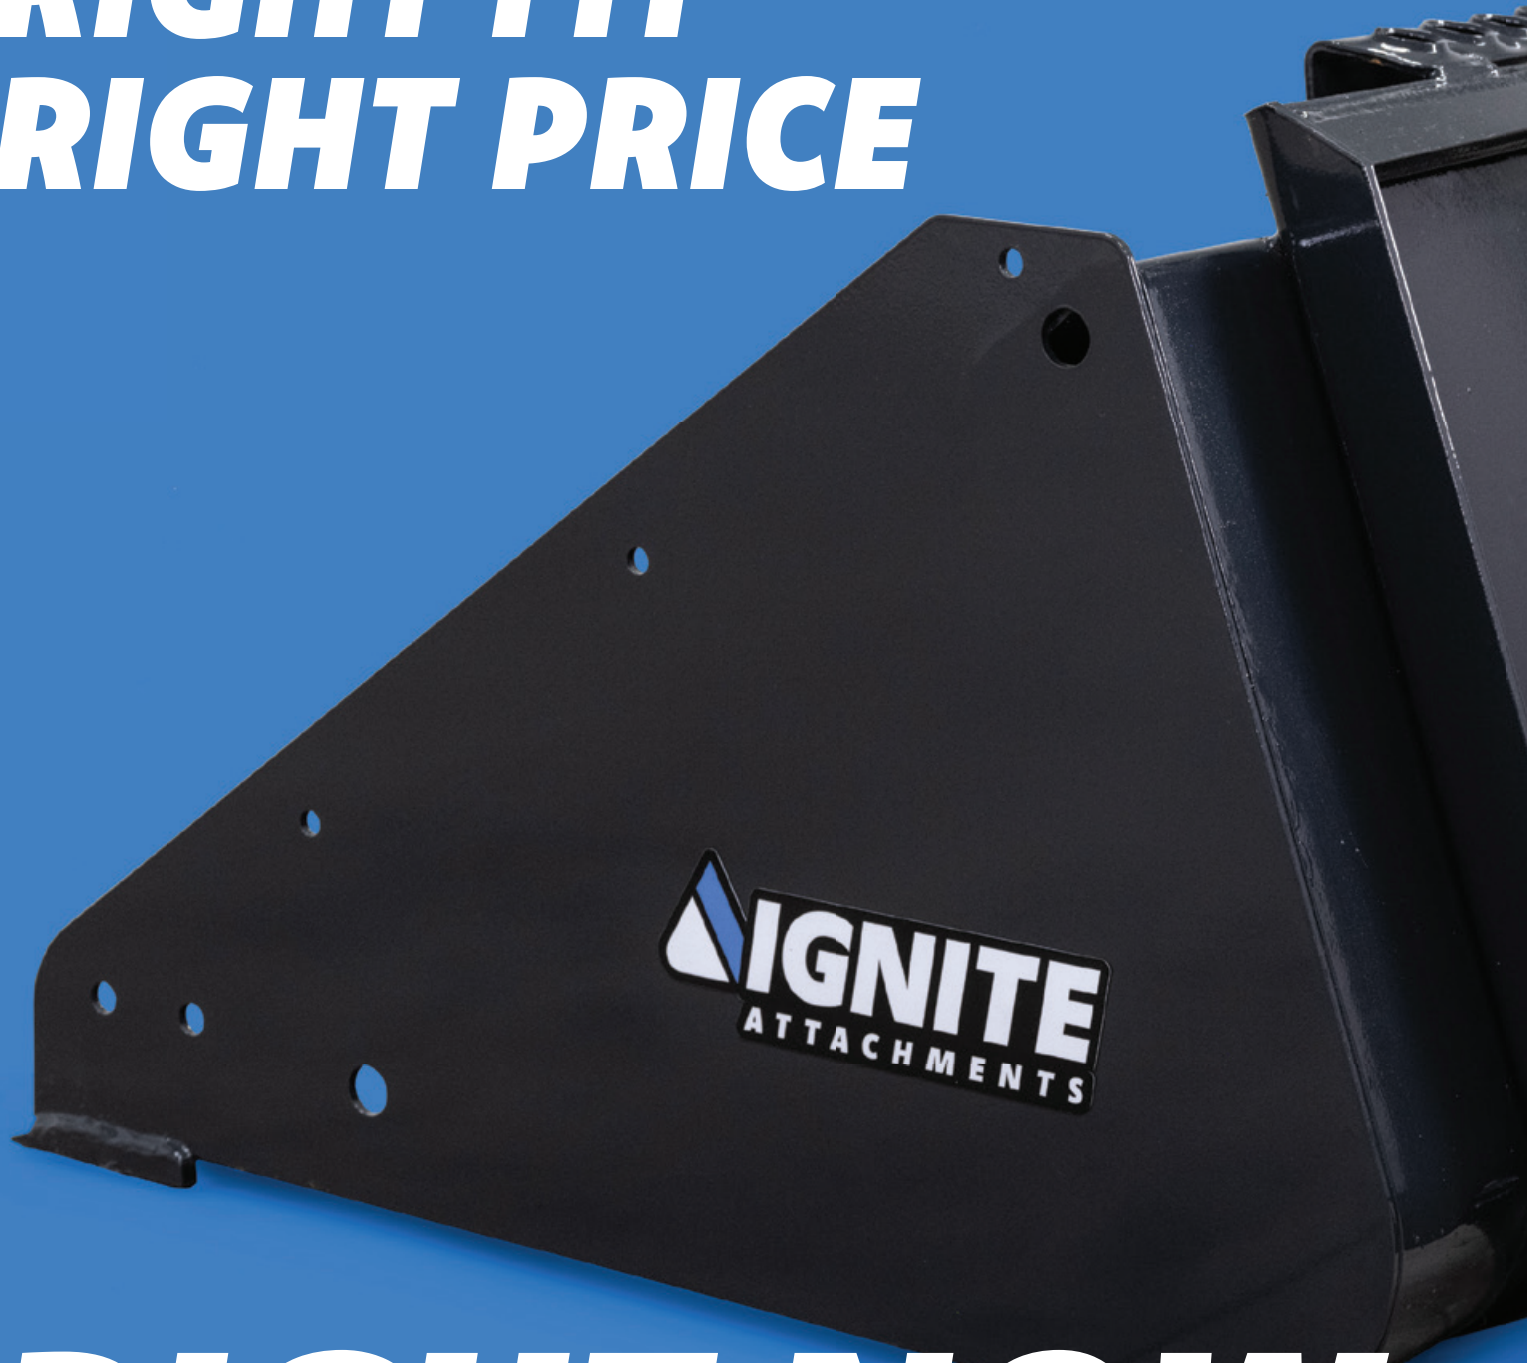

**RIGHT NOW**

